

# DELTA®

Spring Energized Metal Seals




## SEALING CONCEPT

The DELTA® seal is a member of the HELICOFLEX® family of spring energized seals. The sealing principle of the HELICOFLEX® family of seals is based upon the plastic deformation of a jacket that has greater ductility than the flange materials. This occurs between the sealing face of a flange and an elastic core composed of a close-wound helical spring. The spring is selected to have a specific compression resistance. During compression, the resulting specific pressure forces the jacket to yield and ensures positive contact with the flange sealing faces. Each coil of the helical spring acts independently and allows the seal to conform to irregularities on the flange surface.



The DELTA® seal is unique in that it uses two small ridges or “DELTA”s on the face of the seal. The load required to plastically deform the jacket material is greatly reduced by concentrating the compression load on the DELTAs. The resulting high contact stress in the seal track makes the DELTA® seal an excellent choice for ultra-high vacuum applications that require ultra-low Helium leak rates. There is typically no risk of damaging the flange sealing surfaces as long as the minimum hardness requirements are maintained.

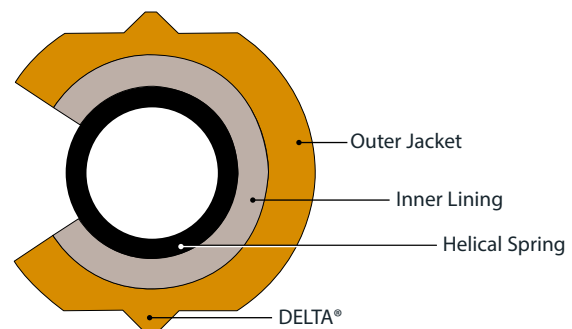

## TECHNETICS GROUP

EnPro Industries companies


sales@technetics.com

technetics.com

**Technetics**  
GROUP

EnPro Industries companies

TYPICAL LOAD DEFLECTION CURVE

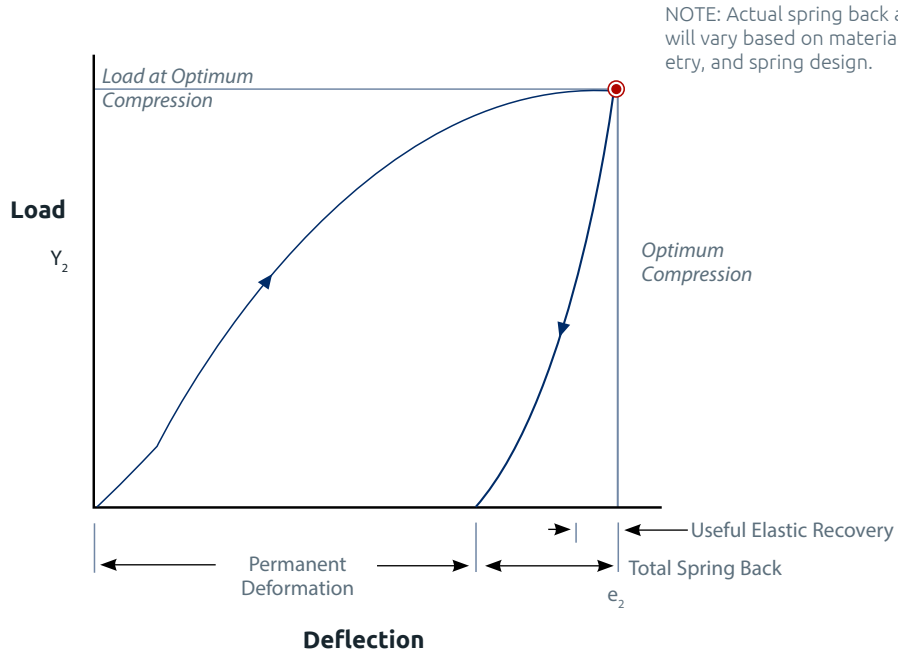

LEAK PERFORMANCE

DELTA® seals can provide Helium leak rate performance of  $< 1 \times 10^{-11}$  std.cc/sec (per meter of seal circumference). Actual leak rate will depend on seal jacket, cavity/flange finish, bolting, hardware robustness and cleanliness level.

CLASSIFICATION OF SEAL TYPE

Cross Section Type	HNV low load (DELTA® Seal)										
	1 = jacket only						2 = jacket with inner lining				
Jacket/Lining	0	1	2	3	4	5	6	7	8	9	
Jacket Orientation		—			—	—	—		—		
Section Orientation	○	○—	—	—○	—	○—○	○—	—	—○	○○	

EXAMPLE

<b>HN</b>	<b>2</b>	<b>0</b>	<b>0</b>
Cross Section Type	# Jackets/Lining	Jacket Orientation	Section Orientation

**DELTA® CHARACTERISTIC VALUES**


Jacket Material	Free Height	Seal Type	Installation Compression $e_2$	Seal Diameter	Seating Load PCI Y <sub>2</sub>	Maximum Temperature °F °C	
Aluminum	0.075	HNV100	Contact us at sales@technetics.com				
	0.102	HNV200	0.028	0.750 to 8.000	800	428	220
	0.130	HNV200	0.031	1.000 to 16.000	800	482	250
	0.157	HNV200	0.035	2.000 to 20.000	800	536	280
	0.189	HNV200	0.035	3.000 to 30.000	800	536	280
	0.220	HNV200	0.039	4.000 to 30.000	860	608	320
	0.264	HNV200	0.043	5.000 to 30.000	860	644	340
Silver	0.067	HNV100	Contact us at sales@technetics.com				
	0.094	HNV200	0.024	0.750 to 6.000	915	536	280
	0.122	HNV200	0.024	1.000 to 12.000	915	572	300
	0.154	HNV200	0.028	2.000 to 18.000	915	662	350
	0.185	HNV200	0.031	3.000 to 20.000	915	698	370
	0.213	HNV200	0.031	4.000 to 20.000	970	752	400
	0.256	HNV200	0.035	5.000 to 20.000	1030	842	450
Copper	0.065	HNV100	Contact us at sales@technetics.com				
	0.092	HNV200	0.017	0.750 to 8.000	1030	716	380
	0.120	HNV200	0.021	1.000 to 16.000	1030	716	380
	0.155	HNV200	0.025	2.000 to 18.000	1030	788	420
	0.179	HNV200	0.025	3.000 to 20.000	1030	842	450
	0.210	HNV200	0.025	4.000 to 30.000	1030	896	480
	0.250	HNV200	0.029	5.000 to 30.000	1085	968	520
Nickel (Annealed)	0.065	HNV100	Contact us at sales@technetics.com				
	0.092	HNV200	0.017	0.750 to 8.000	1030	788	420
	0.120	HNV200	0.021	1.000 to 16.000	1030	896	480
	0.155	HNV200	0.025	2.000 to 18.000	1030	1022	550
	0.179	HNV200	0.025	3.000 to 20.000	1030	1112	600
	0.210	HNV200	0.025	4.000 to 30.000	1030	1202	650
	0.250	HNV200	0.029	5.000 to 30.000	1085	1202	650
Stainless Steel	Contact us at sales@technetics.com						

Dimensions in inches


NOTES:

1. PCI = Pounds force per circumferential inch.
2. Seating load (Y<sub>2</sub>) is an approximation and may vary based on groove clearance, seal diameter and tolerance. Seating load is for circular seals only.
3. The customer must verify that system bolts and flanges can generate the required seating load without warping or distorting.
4. The customer must test and verify that the seal design meets customer designated performance requirements.
5. Seal type HNV100 is available as an option only. Type HNV200 is preferred due to its protective inner lining and can be expected to produce better results.
6. Contact Us at sales@technetics.com for low pressure applications.

**INTERNAL VACUUM: SEAL TYPE HNV200**

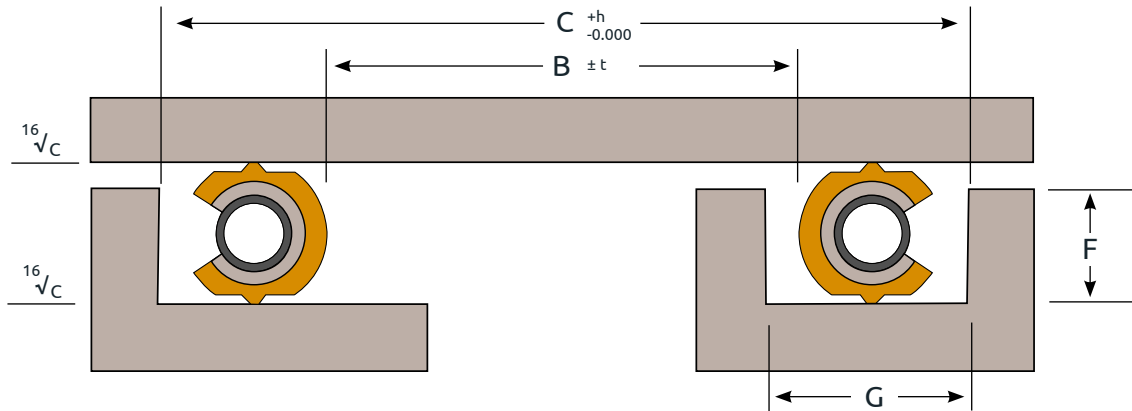

**EXTERNAL VACUUM: SEAL TYPE HNV220**

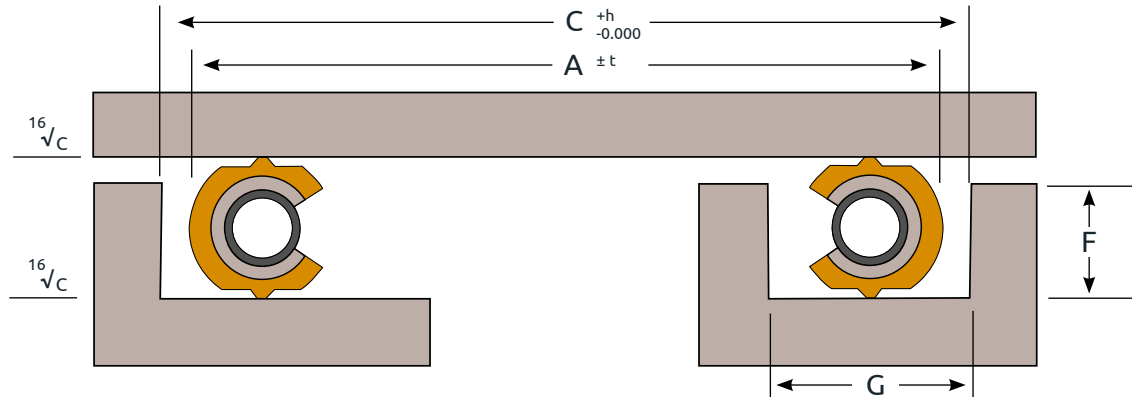

**SEAL AND GROOVE SIZING CALCUCATIONS**

The equations below can be used for basic groove calculations. Applications that have significant thermal expansion may require additional clearance. Please contact us at sales@technetics.com for design assistance.

**DETERMINING SEAL DIAMETER:**

Internal Vacuum  
 < 12"  $B = C - X - 2$  (Seal Section x 0.933)  
 ≥ 12" Contact Us at sales@technetics.com

External Vacuum  
 $A = C - X$

**DETERMINING GROOVE DIAMETER:**

Internal Vacuum  
 < 12"  $C = B + X + 2$  (Seal Section x 0.933)  
 ≥ 12" Contact Us at sales@technetics.com

External Vacuum  
 $C = A + X$

Tolerancing: See chart

Where: A = Seal Outer Diameter  
 B = Seal Inner Diameter  
 C = Groove Outer Diameter  
 X = Diametrical Clearance

DELTA® GROOVE DIMENSIONS

Seal						Groove					
Jacket Material	Free Height	Seal Section	Seal Type	Seal Diameter Range	Seal Tolerance $\pm$	Diametrical Clearance x	Seating Load PCI Y <sub>2</sub>	Groove Tolerance h	Groove Depth F	Groove Width G (Min)	Min. Flange Hardness (Vickers)
Aluminum	0.075	0.079	HN100	-	-	Contact us at sales@technetics.com					
	0.102	0.106	HN200	0.750 to 8.000	0.005	0.020	800	0.010	0.075 ± 0.002	0.150	65
	0.130	0.134	HN200	1.000 to 16.000	0.005	0.030	800	0.010	0.099 ± 0.002	0.180	65
	0.157	0.161	HN200	2.000 to 20.000	0.005	0.030	800	0.010	0.122 ± 0.002	0.210	65
	0.189	0.193	HN200	3.000 to 30.000	0.005	0.035	800	0.010	0.154 ± 0.003	0.245	65
	0.220	0.228	HN200	4.000 to 30.000	0.005	0.040	860	0.010	0.180 ± 0.003	0.280	65
	0.264	0.272	HN200	5.000 to 30.000	0.005	0.040	860	0.010	0.220 ± 0.003	0.320	65
Silver	0.067	0.071	HN100	-	-	Contact us at sales@technetics.com					
	0.094	0.098	HN200	0.750 to 6.000	0.005	0.020	915	0.010	0.070 ± 0.002	0.140	120
	0.122	0.126	HN200	1.000 to 12.000	0.005	0.020	915	0.010	0.098 ± 0.002	0.165	120
	0.154	0.157	HN200	2.000 to 18.000	0.005	0.025	915	0.010	0.126 ± 0.002	0.200	120
	0.185	0.189	HN200	3.000 to 20.000	0.005	0.030	915	0.010	0.154 ± 0.003	0.235	120
	0.213	0.220	HN200	4.000 to 20.000	0.005	0.030	970	0.010	0.180 ± 0.003	0.265	120
	0.256	0.264	HN200	5.000 to 20.000	0.005	0.035	1030	0.010	0.220 ± 0.003	0.315	120
Copper	0.065	0.069	HN100	-	-	Contact us at sales@technetics.com					
	0.092	0.096	HN200	0.750 to 8.000	0.005	0.020	1030	0.010	0.075 ± 0.001	0.130	130
	0.120	0.124	HN200	1.000 to 16.000	0.005	0.020	1030	0.010	0.098 ± 0.002	0.160	130
	0.155	0.159	HN200	2.000 to 18.000	0.005	0.025	1030	0.010	0.130 ± 0.002	0.200	130
	0.179	0.183	HN200	3.000 to 20.000	0.005	0.025	1030	0.010	0.154 ± 0.002	0.225	130
	0.210	0.218	HN200	4.000 to 30.000	0.005	0.025	1030	0.010	0.185 ± 0.002	0.255	130
	0.250	0.257	HN200	5.000 to 30.000	0.005	0.030	1085	0.010	0.220 ± 0.003	0.300	130
Nickel (Annealed)	0.065	0.069	HN100	-	-	Contact us at sales@technetics.com					
	0.092	0.096	HN200	0.750 to 8.000	0.005	0.020	1030	0.010	0.075 ± 0.001	0.130	220
	0.120	0.124	HN200	1.000 to 16.000	0.005	0.020	1030	0.010	0.098 ± 0.002	0.160	220
	0.155	0.159	HN200	2.000 to 18.000	0.005	0.025	1030	0.010	0.130 ± 0.003	0.200	220
	0.179	0.183	HN200	3.000 to 20.000	0.005	0.025	1030	0.010	0.154 ± 0.002	0.225	220
	0.210	0.218	HN200	4.000 to 30.000	0.005	0.025	1030	0.010	0.185 ± 0.002	0.255	220
	0.250	0.257	HN200	5.000 to 30.000	0.005	0.030	1085	0.010	0.220 ± 0.003	0.300	220
Stainless Steel	Contact us at sales@technetics.com					Contact us at sales@technetics.com					

NOTES:



1. Contact Us at sales@technetics.com for additional sizes.
2. Seal type HN100 is available as an option only. Type HN200 is preferred due to its protective inner lining and can be expected to produce better results.
3. Seal diameters ≥ 12" may require special tolerancing. Contact Applications Engineering for design assistance.

SHAPED SEAL: DELTA® GROOVE DIMENSIONS

Seal								Groove			
Jacket Material	Free Height	Seal Section g	Seal Type	Installation Compression $e_2$	Seating Load PCI $Y_2$	Seal Tolerance $t$	Bend Radius ID R (Min)	Groove Tolerance $h$	Groove Depth $F$	Groove Width $G$ (Min)	Min. Flange Hardness (Vickers)
Aluminum	0.075	0.079	HNV100	Contact us at sales@technetics.com				Contact us at sales@technetics.com			
	0.102	0.106	HNV200	0.028	1200	Fit Template	0.750	0.010	0.075 ± 0.002	0.170	65
	0.130	0.134	HNV200	0.031	1050	Fit Template	1.000	0.010	0.099 ± 0.002	0.200	65
	0.157	0.161	HNV200	0.035	1050	Fit Template	1.125	0.010	0.122 ± 0.002	0.230	65
	0.189	0.194	HNV200	0.035	1050	Fit Template	1.375	0.010	0.154 ± 0.003	0.265	65
	0.220	0.228	HNV200	0.039	1170	Fit Template	1.500	0.010	0.180 ± 0.003	0.300	65
	0.264	0.272	HNV200	0.043	1200	Fit Template	1.750	0.010	0.220 ± 0.003	0.340	65
Silver	0.067	0.071	HNV100	Contact us at sales@technetics.com				Contact us at sales@technetics.com			
	0.094	0.098	HNV200	0.024	1050	Fit Template	0.625	0.010	0.070 ± 0.002	0.160	120
	0.122	0.126	HNV200	0.024	1150	Fit Template	0.875	0.010	0.098 ± 0.002	0.185	120
	0.154	0.157	HNV200	0.028	1100	Fit Template	1.000	0.010	0.126 ± 0.002	0.220	120
	0.185	0.189	HNV200	0.031	1100	Fit Template	1.250	0.010	0.154 ± 0.003	0.255	120
Copper	0.065	0.069	HNV100	Contact us at sales@technetics.com				Contact us at sales@technetics.com			
	0.092	0.096	HNV200	0.017	1100	Fit Template	0.625	0.010	0.075 ± 0.001	0.150	130
	0.120	0.124	HNV200	0.021	1350	Fit Template	0.875	0.010	0.098 ± 0.002	0.180	130
	0.155	0.159	HNV200	0.025	1275	Fit Template	1.000	0.010	0.130 ± 0.002	0.220	130
	0.179	0.183	HNV200	0.025	1275	Fit Template	1.125	0.010	0.154 ± 0.002	0.245	130
Nickel (Annealed)	0.065	0.069	HNV100	Contact us at sales@technetics.com				Contact us at sales@technetics.com			
	0.092	0.096	HNV200	0.017	1100	Fit Template	0.625	0.010	0.075 ± 0.001	0.150	220
	0.120	0.124	HNV200	0.021	1350	Fit Template	0.875	0.010	0.098 ± 0.002	0.180	220
	0.155	0.159	HNV200	0.025	1275	Fit Template	1.000	0.010	0.130 ± 0.003	0.220	220
	0.179	0.183	HNV200	0.025	1275	Fit Template	1.125	0.010	0.154 ± 0.002	0.245	220
Stainless Steel	Contact us at sales@technetics.com										

NOTES:

1. PCI = Pounds force per circumferential inch.
2. Seating Load ( $Y_2$ ) is an approximation and may vary based on groove clearance, seal diameter and tolerance. Load values may be slightly higher in corner radii.
3. Seal type HNV100 is available as an option only. Type HNV200 is preferred due to its protective inner lining and can be expected to produce better results.
4. Seal Tolerance: Seal is manufactured to fit customer supplied/purchased groove template.
5. All machining and polishing marks must follow seal circumference.

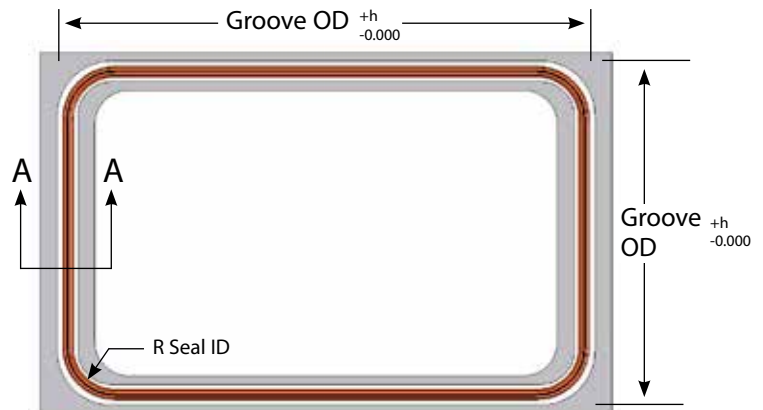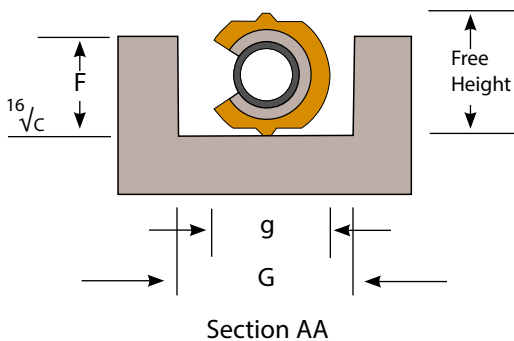

# APPLICATIONS DATA SHEET

Tel: 800-233-1722 Fax: 803-783-4279

E-Mail: sales@technetics.com



EnPro Industries companies

COMPANY:	PHONE:
CONTACT:	FAX:
ADDRESS:	E-MAIL:
	DATE:

## APPLICATION: (please attach customer drawing / sketch)

Brief Description: \_\_\_\_\_

Annual quantities: \_\_\_\_\_ RFQ Quantities: \_\_\_\_\_

Is This a New Design?  Yes  No Are Modifications Possible?  Yes  No

Drawing or Sketch Attached?  Yes  No What is the Seal Type?  Shaped  Circular

## SERVICE CONDITIONS:

Media: _____	Life Expectancy: _____
Working Temperature: _____	Max/Proof Pressure: _____ @ Temp. = _____
Working Pressure: _____	Max Temperature: _____ @ Pressure = _____
Pressure Direction: <small>(Internal/External/Axial)</small> _____	<b>Target Sealing Level:</b> Helium: _____ Std.cc/sec
Pressure Cycles: _____	Flow Rate: _____ cc/minute
Temperature Cycles: _____	Other: _____

## FLANGE DETAILS: (Please Provide Drawing)

Amount of Flange Movement in Service: (Inches) Radial: \_\_\_\_\_ Axial: \_\_\_\_\_ #Cycles: \_\_\_\_\_

Material: \_\_\_\_\_ Thickness: \_\_\_\_\_

Groove / Counter Bore: \_\_\_\_\_ Please list dimensions in Groove Details section

ANSI Raised Face Size: \_\_\_\_\_ # Rating: \_\_\_\_\_ Face Surface Finish: \_\_\_\_\_ (RMS)

Flange(s) with Clamping System: (ISO,KF, etc) Standard: \_\_\_\_\_ Size: \_\_\_\_\_

Other: \_\_\_\_\_ Description: \_\_\_\_\_ (Please Provide Drawing)

## GROOVE DETAILS: (Please Provide Drawing)

Type (Rectangular, Dovetail, etc.): \_\_\_\_\_

Outer Diameter: _____	Tolerance: _____	Depth: _____	Tolerance: _____
Inner Diameter: _____	Tolerance: _____	Finish (RMS) _____	Type: _____

Finish Type: lathe (circular), endmill (multi-directional), other

## BOLTING DETAILS: (Please Provide Drawing)

Size: _____	Type / Grade: _____
Number: _____ Bolt Circle _____	Tapped / Through: _____

## OTHER:

Special coating / plating specification: \_\_\_\_\_

Special quality / inspection specifications: \_\_\_\_\_

Other: \_\_\_\_\_